


REVISIONS				
ECO NO.	REV.	DESCRIPTION	DATE	REV. / APPV. BY
	A	RELEASED FOR MANUFACTURING	6/20/2016	KLC / VXP

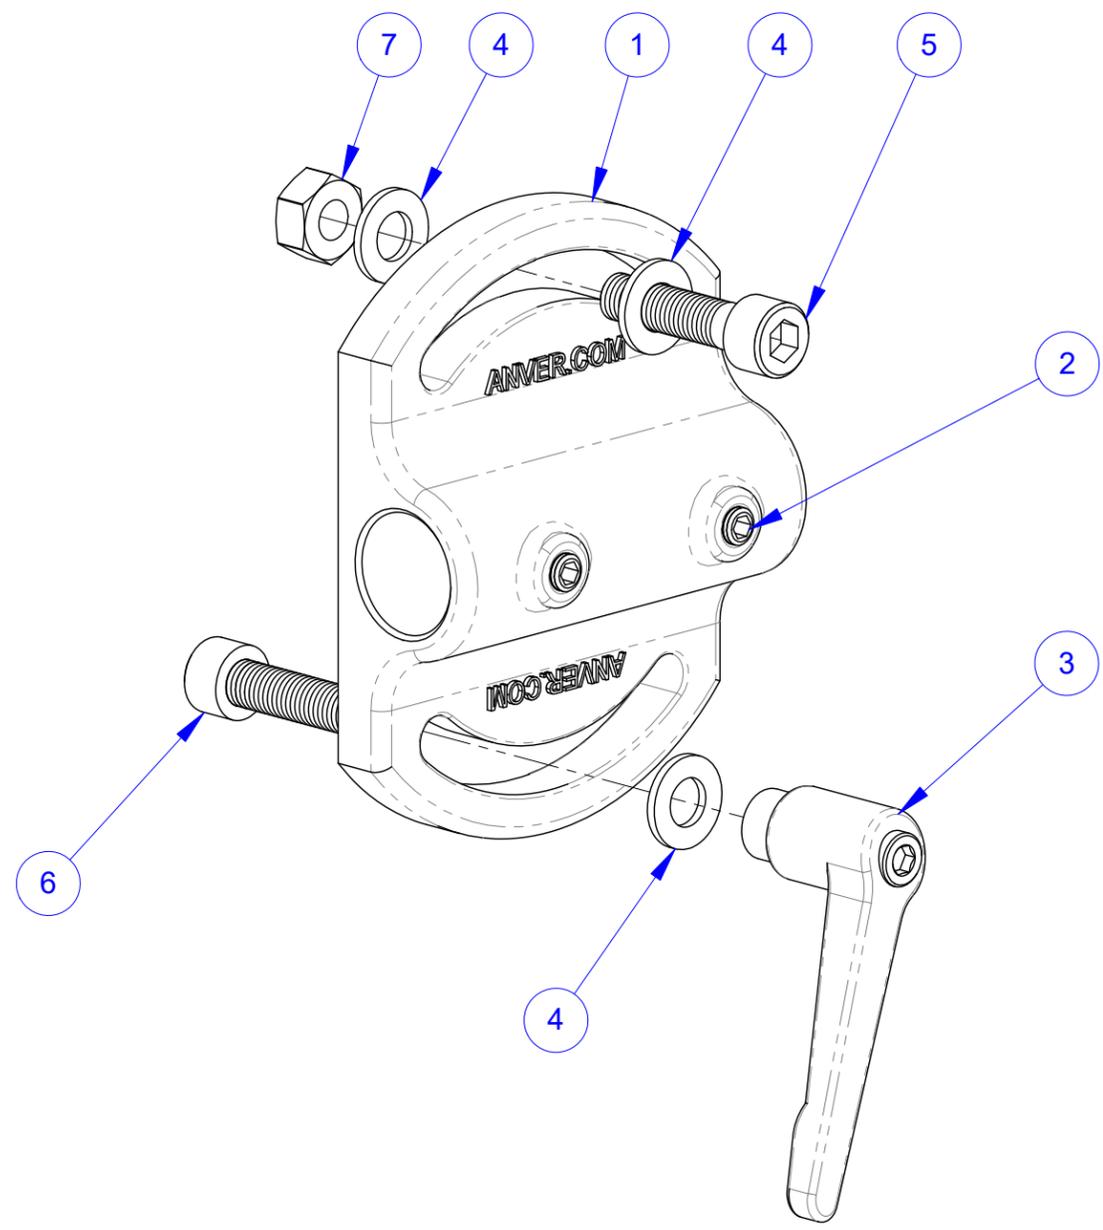

ITEM	QTY	DWG#	PART NUMBER	DESCRIPTION
7	1		HHNLM10SS	HEX NUT, 3/8-16 W/ NYLON INSERT
6	1		SHCSM10X40FT	SCREW, SOCKET HEAD CAP, M10 x 40mm, STEEL, ZP, CLASS 12.9, PITCH 1.5 (FULLY THREADED)
5	1		SHCSM10X40	SCREW, SOCKET HEAD CAP, M10 X 40MM, STEEL, ZP, CLASS 12.9, PITCH 1.5
4	3		FLWM10	FLAT WASHER, M10, STEEL, ZINC PLATED
3	1		HDLM10FPRAT	HANDLE, M10 RATCHETING (FEMALE)
2	2		SHSSM8X10	SCREW, SOCKET HEAD SET, M8 X 10MM, STEEL, ZP, PITCH 1.25, W/ NYLON PATCH
1	1	21301025	21301025	HANDLEBAR BRACKET MODIFICATION, BOLT-ON, ROTATING w/LOCKING HANDLE

NOTES:

MATERIAL: SEE B.,O.M.	UNLESS OTHERWISE SPECIFIED		FIRST USED SO160004850	 36 PARMENTER ROAD HUDSON, MA 01749 ANVER.COM
	REMOVE ALL BURRS & BREAK SHARP EDGES	N/A	DWN: KORIE CROSSMAN 06/15/2016	
FINISH: NONE	MAXIMUM SURFACE FINISH	N/A	ENG: VXP 06/15/2016	HANDLEBAR BRACKET ASSEMBLY, ROTATING w/LOCKING HANDLE (80° ROTATION)
	INTERNAL FILLETS	N/A	CHK: VXP 06/15/2016	
	ANGLES	N/A	APR: VXP 06/15/2016	
	TOLERANCES	INCHES		
	.X ±	N/A		SIZE B DWG NO. 21301032 SCALE 1:1.5 SHEET 1 OF 1 REV A
	.XX ±	N/A		
	.XXX ±	N/A		

THIS DRAWING, RELATED DETAIL DRAWINGS & TECHNICAL INFORMATION SUPPLIED WITH THEM ARE THE PROPERTY OF ANVER CORPORATION. ALL EQUIPMENT DESIGN & APPLICATION DATA HEREIN IS CONSIDERED CONFIDENTIAL. NO USE OR DISCLOSURE THEREOF MAY BE MADE WITHOUT WRITTEN PERMISSION FROM ANVER CORPORATION.

