



RIGHT ORIENTATION

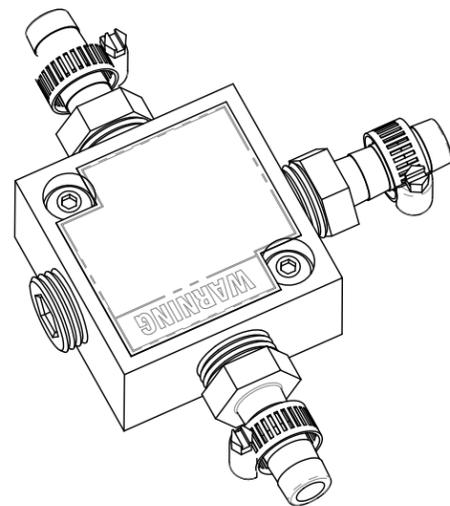

LEFT ORIENTATION

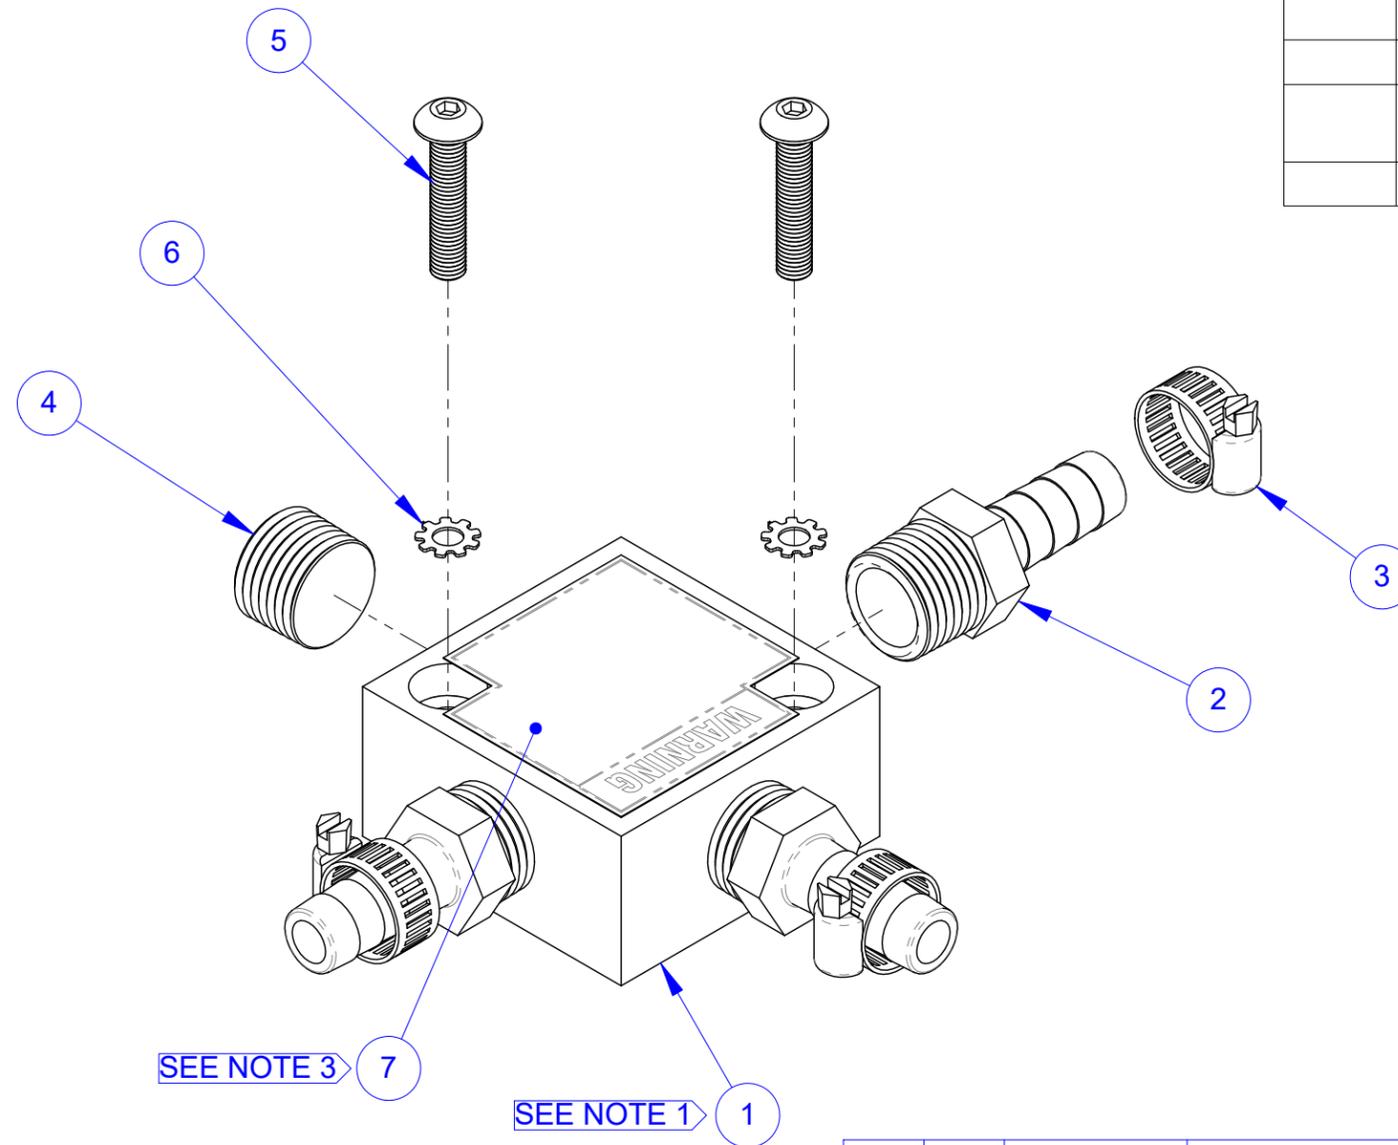

SEE NOTE 3

SEE NOTE 1

REVISIONS

ECO NO.	REV.	DESCRIPTION	DATE	REV. / APPV. BY
	A	RELEASED TO MANUFACTURING	12/4/2009	KMM / VXP
	B	ADDED NOTE	6/1/2011	KLC / VXP
	C	REPLACED BOLT P/N: PHMS10-32X1 WITH P/N: BHCSM5X25SS, REPLACED WASHER P/N: ETLWZP10-32 WITH P/N: ETLWM5	3/5/2015	KLC / VXP
	D	ADDED NOTE 2	1/21/2016	KMM / VXP

7	1		LA057	LABEL - MANIFOLD BLOCK WARNING 1.75" X 1.75" LEXAN
6	2		ETLWM5	EXTERNAL TOOTH LOCKWASHER, M5 (ZINC PLATED)
5	2		BHCSM5X25SS	BUTTON HEAD CAP SCREW M5 X 25mm STAINLESS STEEL
4	1		219P-6	PLUG, 3/8"NPT COUNTERSUNK (NICKEL PLATED)
3	3		CLP-04-W	CLAMP, WORM FOR 3/8" HOSE, SS
2	3		A3838B	HOSE BARB, 3/8"NPT X 3/8"HOSE
1	1	25000058	MB-38F	DISTRIBUTION BLOCK, 3/8 NPT
ITEM	QTY	DWG#	PART NUMBER	DESCRIPTION



NOTES:

1. ALIGN MANIFOLD BLOCK WITH MOUNTING HOLES ON CROSSARM BEFORE ASSEMBLING.
2. FITTING ORIENTATION MAY CHANGE TO SUIT GENERATOR OR OPTIONAL EQUIPMENT.
3. LABEL MAY CHANGE ORIENTATION PENDING WHICH CONFIGURATION USED.

MATERIAL:
SEE B.O.M.

FINISH:
NONE

UNLESS OTHERWISE SPECIFIED

REMOVE ALL BURRS & BREAK SHARP EDGES	N/A
MAXIMUM SURFACE FINISH	N/A
INTERNAL FILLETS	N/A
ANGLES	N/A
TOLERANCES	INCHES
.X ±	N/A
.XX ±	N/A
.XXX ±	N/A

FIRST USED
DWN: VITOR PEREIRA 03/04/2011

ENG: VXP 03/04/2011

CHK: VXP 03/04/2011

APR: VXP 03/04/2011

TITLERS & LIFT ASSY'S.

APR: VXP 03/04/2011

THIS DRAWING, RELATED DETAIL DRAWINGS & TECHNICAL INFORMATION SUPPLIED WITH THEM ARE THE PROPERTY OF ANVER CORPORATION. ALL EQUIPMENT DESIGN & APPLICATION DATA HEREIN IS CONSIDERED CONFIDENTIAL. NO USE OR DISCLOSURE THEREOF MAY BE MADE WITHOUT WRITTEN PERMISSION FROM ANVER CORPORATION.



SIZE
B

SCALE
1:1



36 PARMENTER ROAD
HUDSON, MA 01749
ANVER.COM

OUTER CROSSARM MANIFOLD ASSEMBLY, 3/8" NPT (TILTERS / LIFT ASSEMBLIES)

DWG NO. **32000324**

SHEET 1 OF 1 REV D