


| REVISIONS | | | | |
|-----------|------|---|-----------|-----------------|
| ECO NO. | REV. | DESCRIPTION | DATE | REV. / APPV. BY |
| | A | RELEASED TO MANUFACTURING | 2/27/2012 | ENM / VXP |
| | B | MOUNTING BLOCK WAS P/N: 21300638, LABEL WAS P/N: LA13300080 ADDED LABEL P/N: 13300333 | 3/28/2012 | ENM / VXP |
| | C | ADDED NOTE #3 | 6/5/2012 | ENM / VXP |
| | D | NOTE #1 WAS "LOCTITE #271" | 1/11/2013 | ENM / JPC |
| | E | HOSE BARB WAS A1212B | 5/19/2014 | ENM / VXP |
| | F | ADDED COVER, P/N: 24900040 | 5/5/2015 | PI / JPC |

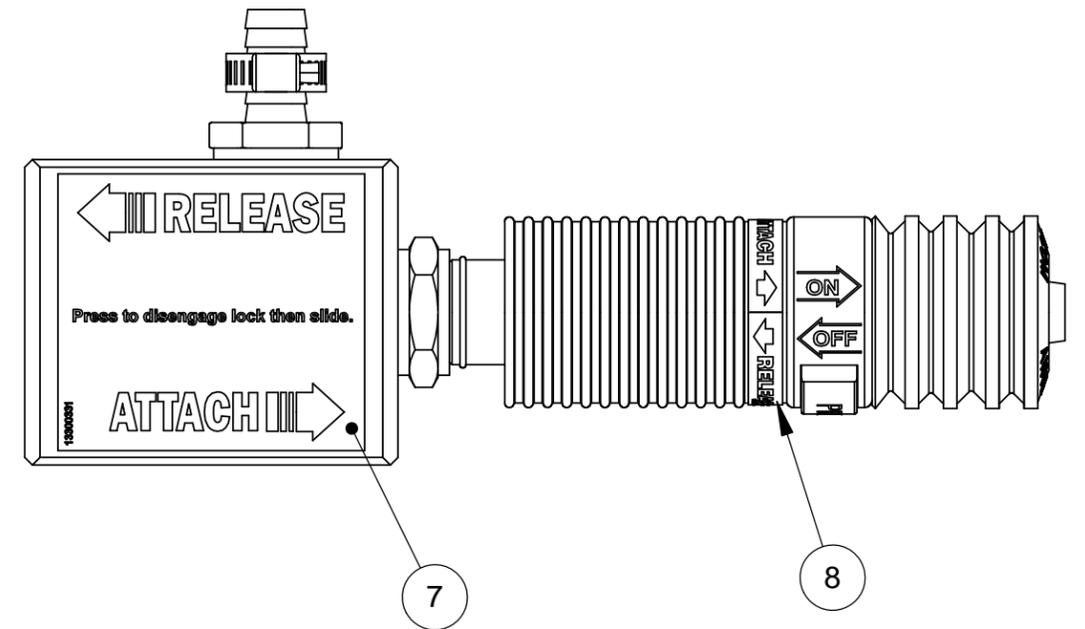

| ITEM | QTY. | Dwg # | PART NUMBER | DESCRIPTION |
|------|------|----------|-------------|--|
| 9 | 1 | 24900040 | 24900040 | COVER, MODIFIED BL40 VACUUM CUP |
| 8 | 1 | | 13300333 | LABEL, ATTACH/RELEASE FOR THE LOCKING SLIDE VALVE |
| 7 | 1 | | 13300331 | LABEL, ATTACH/RELEASE (< REL. / ATTACH >) |
| 6 | 2 | | SHSSM8X10 | SCREW, SOCKET HEAD SET, M8 X 10MM, STEEL, ZP, PITCH 1.25, W/ NYLON PATCH |
| 5 | 2 | | CLP-05-W | CLAMP, WORM FOR 1/2" HOSE (THIN VERSION) |
| 4 | 2 | | A12G12B | Hose Barb, 1/2"BSPP to 1/2"Hose W/Sealing washer |
| 3 | 1 | | SV-12G-L | SLIDE VALVE, 1/2" BSPP FEMALE (LOCKING RED SLEEVE) |
| 2 | 1 | | HSHN12G | FITTING, HEX NIPPLE, 1/2" BSPP TO 1/2" BSPP (w/ WASHERS) |
| 1 | 1 | 21300927 | 21300927 | MOUNTING BRACKET, ADJUSTABLE FOR SLIDE VALVES ON HANDLEBARS |

Notes:

1. USE LOCTITE #242 OR ND12150 ON ALL BSPP THREADED PARTS.
2. TORQUE TO 10 LBF-FT (12 N-M). DO NOT OVER TIGHTEN.
3. --

| | | | | |
|--|--------------------------------------|--------|-----------------------------|---|
| MATERIAL: SEE B.O.M. | UNLESS OTHERWISE SPECIFIED | | FIRST USED |  36 PARMENTER ROAD HUDSON, MA 01749 (978)-568-0221 |
| | REMOVE ALL BURRS & BREAK SHARP EDGES | N/A | DWN: ERIC MILLER 02/27/2012 | |
| | MAXIMUM SURFACE FINISH | N/A | ENG: VXP 02/27/2012 | |
| | INTERNAL FILLETS | N/A | CHK: VXP 02/27/2012 | |
| | ANGLES | N/A | APR: VXP 02/27/2012 | |
| FINISH: NONE | TOLERANCES | INCHES | |  THIRD ANGLE PROJECTION |
| | .X ± | N/A | | |
| | .XX ± | N/A | | |
| | .XXX ± | N/A | | |
| | | | | |
| THIS DRAWING, RELATED DETAIL DRAWINGS & TECHNICAL INFORMATION SUPPLIED WITH THEM ARE THE PROPERTY OF ANVER CORPORATION. ALL EQUIPMENT DESIGN & APPLICATION DATA HEREIN IS CONSIDERED CONFIDENTIAL. NO USE OR DISCLOSURE THEREOF MAY BE MADE WITHOUT WRITTEN PERMISSION FROM ANVER CORPORATION. | | | SIZE B | DWG NO. 78000013 |
| | | | SCALE 1:1.5 | SHEET 1 OF 1 |
| | | | REV F | CONTROL CODE: MA |